

# FIXTURES


## AREA

### Round Parking/Roadway Light - J Series

This 20.5" diameter housing has field adjustable IES Type II or Type III optics. Ideally suited for roadway applications, parking areas or for building mounted security lighting. The fixture uses a round steel pole with an internal slide-in ballast. The wall mounted fixture uses a remote ballast. Every Round Area light includes the fixture, ballast frame and 5.5" diameter steel pole.

A 19' pole height is standard; 15', 25' and 30' poles also available. Housing and pole are standard with Ruud's DeltaGuard finish, featuring an E-coat epoxy primer and medium bronze acrylic powder topcoat. Mounting arms for the Post Top Mount come only with a black DeltaGuard finish.

The light is available with either a Flat or Dome top and 200 - 400 MH lamps.

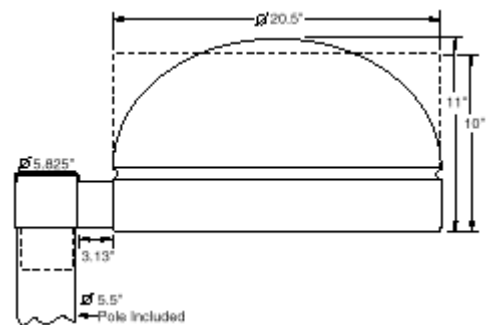

### Round Area Cutoff Light - J Series

This 20.5" diameter housing has a compact forward-throw reflector providing a main beam of 60°+ from vertical (30° from horizontal), providing wide lateral distribution and improved uniformities (IES Type IV). A Backlight Shield accessory (standard on Wall Mount) provides -5° house-side cutoff. The fixture uses a round steel pole with an internal slide-in ballast. Every Round Area light includes the fixture, ballast frame and 5.5" diameter steel pole. A 19' pole height is standard; 15', 25' and 30' poles also available.

Housing and pole are standard with Ruud's DeltaGuard finish, featuring an E-coat epoxy primer and medium bronze acrylic powder topcoat. Mounting arms for the Post Top Mount come only with a black DeltaGuard finish.

The light is available with either a Flat or Dome top and 200 - 400 MH lamps.




**For additional information and availability please contact the  
DSCP Lighting Team at 1 800 DLA BULB**



# FIXTURES

## AREA

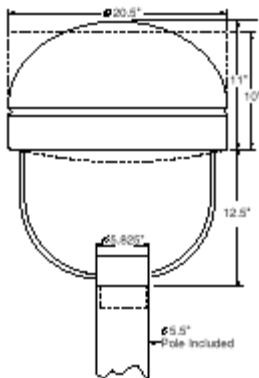

### Round Quadrate Vertical - J Series

This 20.5" diameter housing has a Vertical Lamp, for 200 through 400W MH mogul base lamps. All provide quadrate distribution (IES Type V) (the mogul base system provides the greatest uniformities and optimum pole spacings). The optical chamber is sealed to reduce dirt contamination. The fixture uses a round steel pole with an internal slide-in ballast. Every Round Area light includes the fixture, ballast frame and 5.5" diameter steel pole.

A 19' pole height is standard; 15', 25' and 30' poles also available. Housing and pole are standard with Ruud's DeltaGuard finish, featuring an E-coat epoxy primer and medium bronze acrylic powder topcoat.

Mounting arms for the Post Top Mount come only with a black DeltaGuard finish.

The light is available with either a Flat or Dome top.



### Wedge Light WAC/WPR Series

#### WAC Series Area Cutoff

The Area Cutoff has a compact forward-throw reflector with a main beam of 60°+ from vertical (30° from horizontal), providing wide lateral distribution and improved uniformities. A Backlight Shield accessory (standard on AC Series Wall Mount) permits house-side cutoff adjustability.

#### WPR Series Parking/Roadway

The 16" housing of the Parking/Roadway Light has a Type III asymmetric distribution pattern. The 22" housing has field-adjustable Type II or Type III optics. Ideally suited for roadway applications, parking areas or for building mounted security lighting.

Light is available with 200w through 400w MH lamp.

**For additional information and availability please contact the DSCP Lighting Team at 1 800 DLA BULB**

